



IS243 Rev.04
04/07/2023

BH23/H23

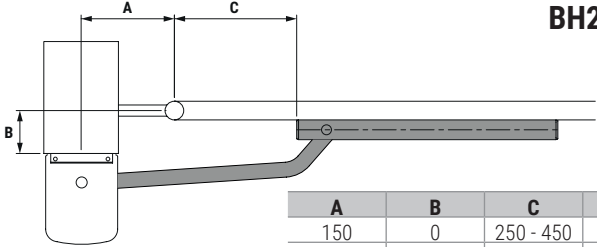


A	B	C	α°
150	0	250 - 450	100°
150	150	400	90°
200	50	330-390	105°
200	100	260-390	90°
250	0	255-355	110°
250	80	300	90°

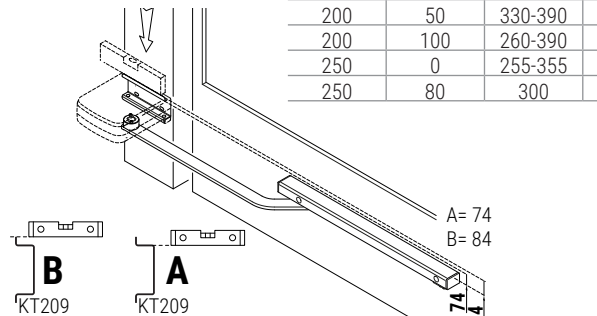


A= 74
B= 84

KT209

R23

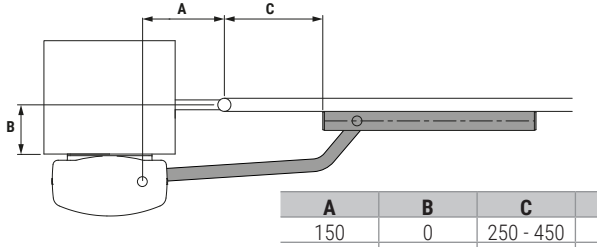


A	B	C	α°
150	0	250 - 450	110°
150	150	400	90°
200	50	310-400	115°
200	100	340-390	110°
250	0	350	135°
250	100	340	105°

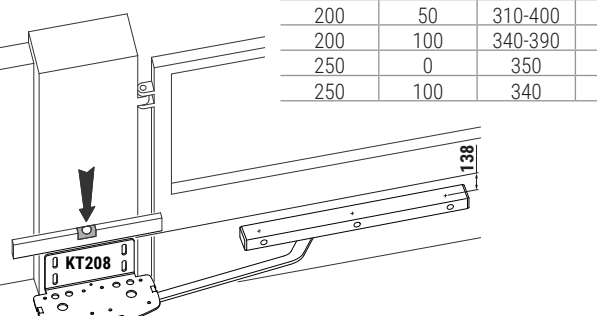

138


KT208

La seguente illustrazione è puramente indicativa. È compito dell'installatore valutare la soluzione migliore in base allo spazio per il fissaggio dell'automazione e la scelta degli accessori.
The following illustration is purely indicative. It is the installer's task to evaluate the best solution according to the space for fixing the automation and the choice of accessories.

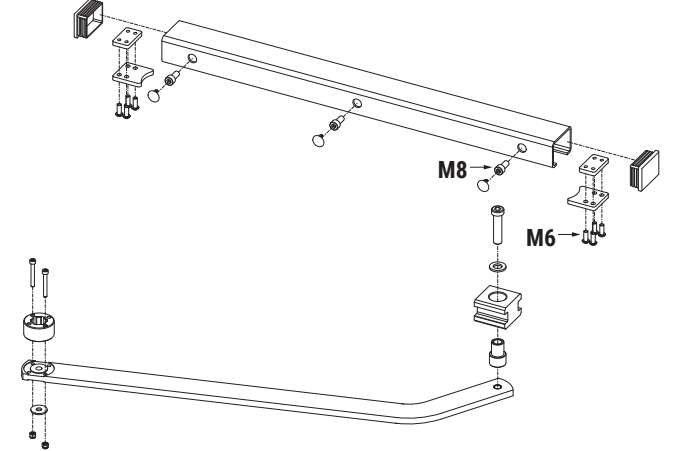

M8


M6

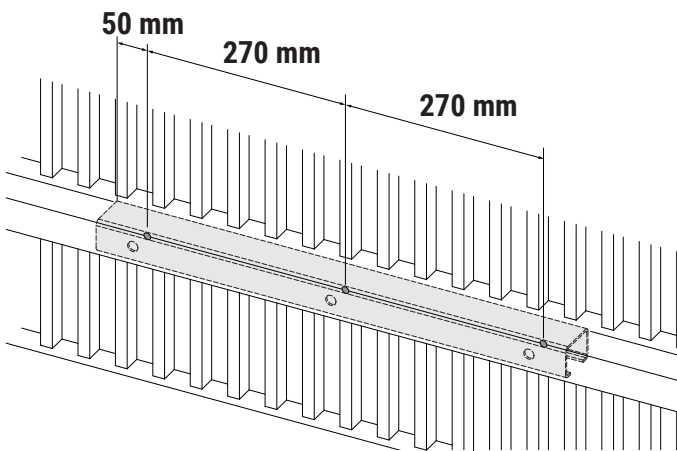


50 mm

270 mm

270 mm

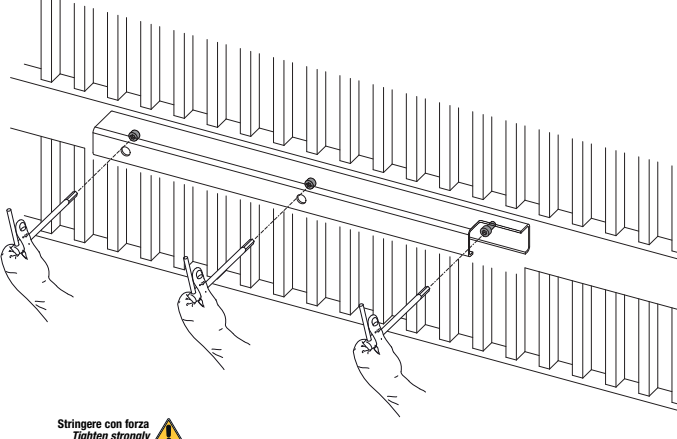

Stringere con forza
Tighten strongly

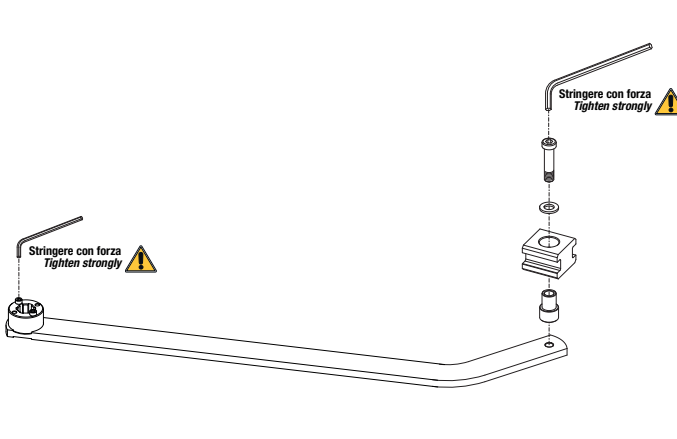

Stringere con forza
Tighten strongly

Stringere con forza
Tighten strongly

